


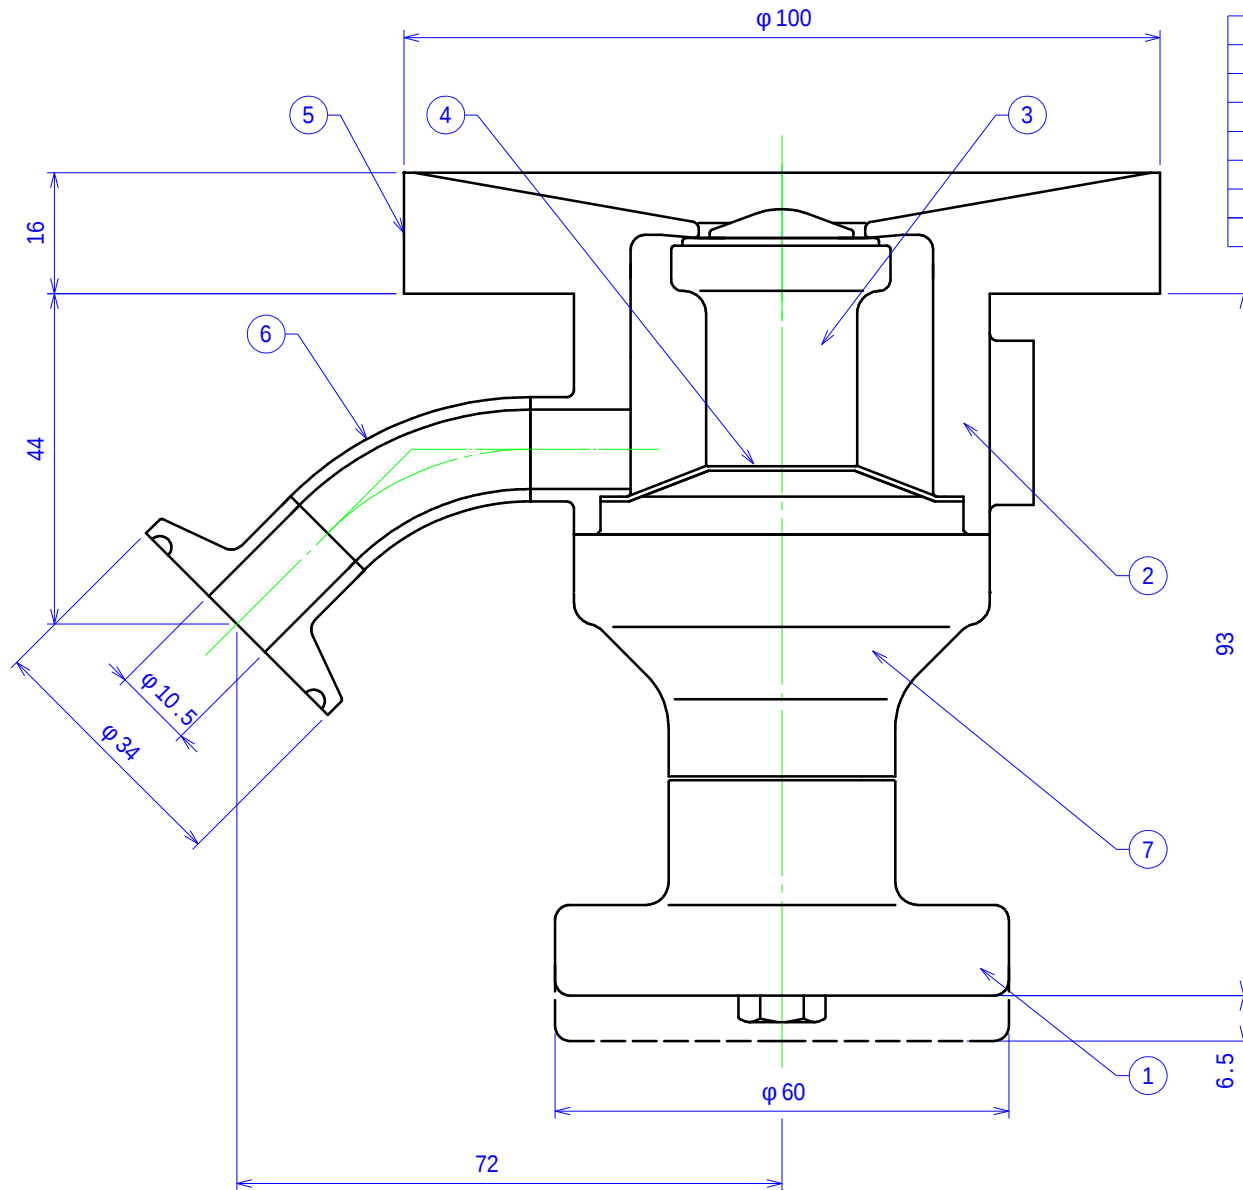

No	Part's Name	Material	Qt'y	Rev.Reason
1	M-Handl	SUS304	1	
2	Body	SUS316L	1	Electro-Polishing
3	D-Main Shaft Ass'y	SUS316L+PTFE	1	Electro-Polishing
4	Diaphragm	PTFE/FKM	1	
5	φ100 × 16t Flange	SUS316L	1	Electro-Polishing
6	8A 45 ° Sweep Elbow	SUS316L	1	Electro-Polishing
7	M-Body	SUS304	1	

指示無き R 面	区分	精級	中級	粗級
R =	—6	0.05	0.08	0.2
	—18	0.08	0.10	0.3
	—50	0.10	0.15	0.4
	—180	0.20	0.30	0.8
	—500	0.30	0.50	1.2
	—1000	0.60	1.00	2.5
指示無き C 面	○			
C =	//			

REV.	DATE	REV.REASON	CHECK

I.O. Technologies

MATERIAL	DATE
	2004/10/14
APPROVED	CHECKED
K.OHTA	S.OHTSUKA

MODEL	SD-B-8 M-1-2-0-0
TITLE	Diaphragm Valve (Tank)
DRAWING No.	TS0043
	1/1